

Tennis Post Inground | Net fitting instructions RevD

APPLICABLE TO TP3 & TP4 NET SYSTEM: NET WINDING HANDLE POST END CAP ROLLER **(A) (B)** NET NET POST PLUMB LEVEL GROUND SLEEVE ATTACHING THE NET TO FIXED END POST ATTACHING THE NET TO WINDING END POST **(A) (B)**



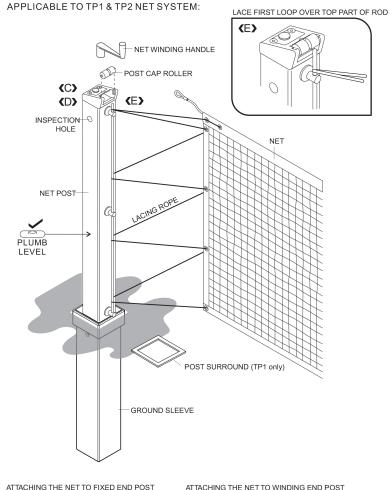



CONTENTS CHECKLIST:

- •2 x Posts
- •2 x Post Ground sleeves
- •1 x Net Winding Handle
- •2 x Post cap rollers (with TP1 & TP2 net only)
- •2 x Post surrounds (with TP1 net only)

Below are the instruction of the PRO and the DELUXE net system. Choose the instruction applicable to the net system you purchased.

NET FITTING INSTRUCTIONS FOR DELUXE NET

- Remove the post cap of the fixed net end post. Fit the net cable to the anchor hook inside the post . Ref. Diag <A>
- •Remove the post cap of the winding net end post. Fit the net cable to the anchor hook inside the post . Ref. Diag
- · Ensure all bolts and screws are tight prior to tensioning the net.
- · Insert the winding handle and tension the net until the net is fully extended. Increase the tension two more turns.
- · Lace the lacing rope already attached to the top band of the net as per overview diagram around the WW rod on the post. Pull rope tight and tie off at the bottom evelet on the sideband of the net.

WARNING: DO NOT OVER TENSION

NET FITTING INSTRUCTIONS FOR TP1&2 NET SYSTEM:

- Fit the net cable to anchor hook inside the fixed end net post. Ref. Diag <C> Use the Inspection hole to locate the anchor.
- Fit the net cable to anchor hook inside winding end net post. Ref. Diag <D> Use the Inspection hole to locate the anchor.
- · Lift the cable at each end and insert the post cap rollers.
- · Ensure all bolts and screws are tight prior to tensioning the net.
- Insert the winding handle and tension the net until the net is fully extended. Increase the tension two more turns.
- •Lace the lacing rope already attached to the top band of the net as per overview diagram around the lacing rod on the post. Make sure the first time the rope gets laced around the rod it is laced around the top part of the rod as per Diag <E>. Pull rope tight and tie off at the bottom eyelet on the sideband of the

WARNING: DO NOT OVER TENSION

GAME ON

